• • 2

Type PA18CAD04...WS, DC

Product Description

Photoelectrics

Diffuse-reflective

PA18CAD04...WS The is part of a family of inexpensive general purpose diffuse reflective sensors in industrial standard 18 mm cylindrical ABS housing.

The sensors are useful in applications where high-accuracy detection as well as small size is required. Compact housing and high

power LED for excellent

performance-size ratio. The potentiometer used for adjustment of the sensitivity makes the sensors highly flexible. The output type is NPN or PNP and the output switching function is NO and NC.

The sensor is characterized by a wide detection angle as well as a short blind zone.

Type Selection

Housing style	Range S _n	Connection	Ordering no. NPN Make & break switching	Ordering no. PNP Make & break switching
M18	0.4 m	Cable	PA 18 CAD 04 NAWS	PA 18 CAD 04 PAWS
M18	0.4 m	Plug	PA 18 CAD 04 NAM1WS	PA 18 CAD 04 PAM1WS

Specifications according to EN60947-5-2

Rated operating distance (\boldsymbol{S}_n)	Up to 0.4 m, reference target Kodak test	F
_	card R27, white, 90% reflective, 100 x 100 mm	l
Blind zone	0 mm @ S _n max.	Ē
Sensitivity control Electrical adjustment Mecanical adjustment Adjustable distance	Adjustable by potentiometer 210° 240° 30-400 mm	
Temperature drift	≤ 0.2%/°C	-
Hysteresis (H) (differential travel)	≤ 20%	(F
Rated operational volt. (U_B)	10 to 30 VDC (ripple included)	
Ripple (U _{rpp})	≤ 10%	Ī
Output current Continuous (I _e) Short-time (I)	\leq 100 mA \leq 100 mA (max. load capacity 100 nF)	Ē
No load supply current (I _o)	≤ 15 mA @ 24 VDC	1
Minimum operational current (I _m)	0.5 mA	
OFF-state current (Ir)	≤ 100 µA	
Voltage drop (U _d)	\leq 2.0 VDC @ 100 mA	

Protection	Short-circuit, reverse polarity and transients	
Light source	InGaAIP, LED, 625 nm	
Light type	Red, modulated	
Emitter angle	±16° @ half sensing distan-	
се		
Light spot	120 x 160 mm @ 200 mm	
Ambient light	30.000 lux	
-	incandescent lamp	
Operating frequency	500 Hz	
Response time		
OFF-ON (ton)	≤ 1.0 ms	
ON-OFF (t _{OFF})	≤ 1.0 ms	
Power ON delay (t _v)	≤ 100 ms	
Output function		
Туре	NPN or PNP	
Switching function	NO and NC	
Indication		
Output ON	LED, yellow	
Signal stability and power ON	LED, green (see curve for condition of stability)	

Miniature sensor range

- Range: 0.4 m
- Sensitivity adjustment by potentiometer
- Modulated, red light 625 nm
- Supply voltage: 10 to 30 VDC
- Output: 100 mA, NPN or PNP, N.O & N.C.
- Degree of protection IP67, IP69K
- LED indication for output, stability and power ON
- · Protection: reverse polarity, short circuit and transients
- Cable and plug versions
- Excellent EMC performance
- Wide detection angle short blind zone



Ordering Key PA18CAD04PAM1WS

Туре	
Housing style —	
Housing size —	
Housing material	
Housing type —	
Detection principle —	
Sensing distance —	
Output type —	
Output configuration—	
Connection type —	
Sensitive adjustment —	



Specifications (cont.)

CARLO GAVAZZI


Environment Installation category	III (IEC 60664/60664A;	Hous Boo
Degree of pollution	60947-1) 3 (IEC 60664/60664A; 60947-1)	Fro Cat Trir
Degree of protection	IP 67, IP 69K*	Loc
Ambient temperature		Мо
Operating Storage	-25° to +60°C (-13° to +140°F) -40° to +70°C (-40° to +158°F)	Con Cat
Vibration	10 to 150 Hz, 1 mm/15 G (IEC 60068-2-6)	Plu
Shock	30 g / 11ms, 3 pos, 3 neg per axis (IEC 60068-2-6, 60068-2-32)	Weig
Rated insulation voltage	500 VAC (rms) IEC protection class III	CE-r Appr

Housing material Body Front material Cable gland Trimmer shaft Locknuts Mounting bracket	ABS, grey PMMA, red POM, Black POM, Dark Grey PBTP, black PPA, black
Connection Cable Plug	PVC, grey, 2 m 4 x 0.25 mm ² , Ø = 4.5 mm M12, 4-pin (CON.14NFW series)
Weight	With cable: 85 g With plug: 25 g
CE-marking	Yes
Approvals	cULus (UL508) supply class 2


* The IP69K test according to DIN 40050-9 for high-pressure, high-temperature wash-down applications. The sensor must not only be dust tight (IP6X), but also able to withstand high-pressure and steam cleaning. The sensor is exposed to high pressure water from a spray nozzle that is fed with 80°C water at 8'000–10'000 KPa (80–100bar) and a flow rate of 14–6L/min. The nozzle is held 100–150 mm from the sensor at angles of 0°, 30°, 60° and 90° for 30s each. The test device sits on a turntable that rotates with a speed of 5 times per minute. The sensor must not suffer any damaging effects from the high pressure water in appearance and function.




Operation Diagram

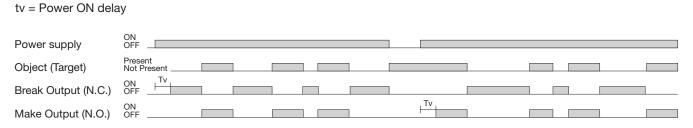


Wiring Diagrams

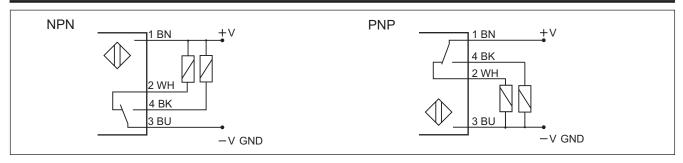


CARLO GAVAZZI

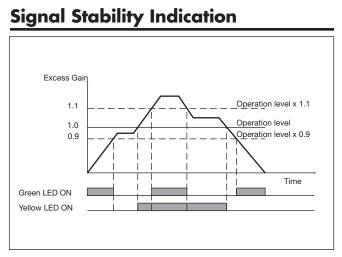


Detection Diagram

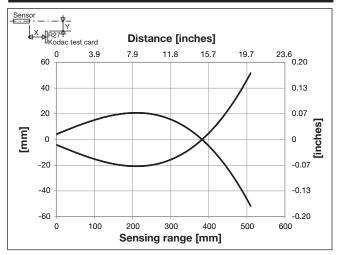


APA18-MB1

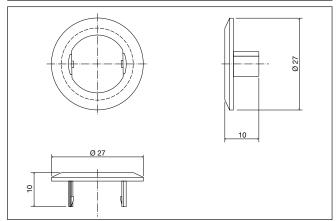

Excess Gain

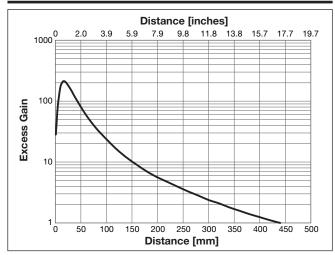


Dimensions

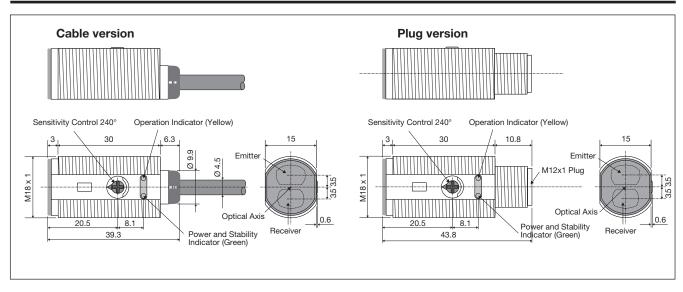




Mounting Systems

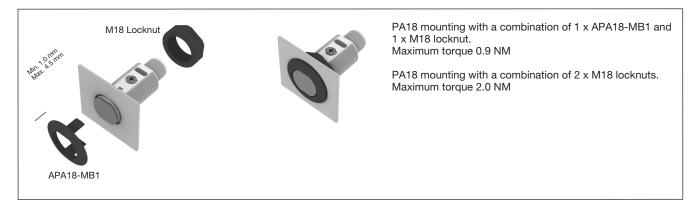

Installation Hints

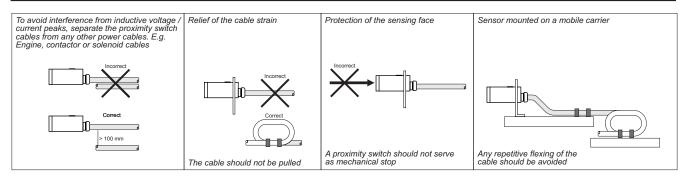

Delivery Contents

- Photoelectric switch: PA 18 CAD04...WS
- Installation instruction on plastic bag
- Screwdriver
- Mounting bracket APA18-MB1
- 2 M18 locknuts
- Packaging: Plastic bag

Accessories

• Connector type CON.14NF..W series